



QueueMaster Assembly Instructions

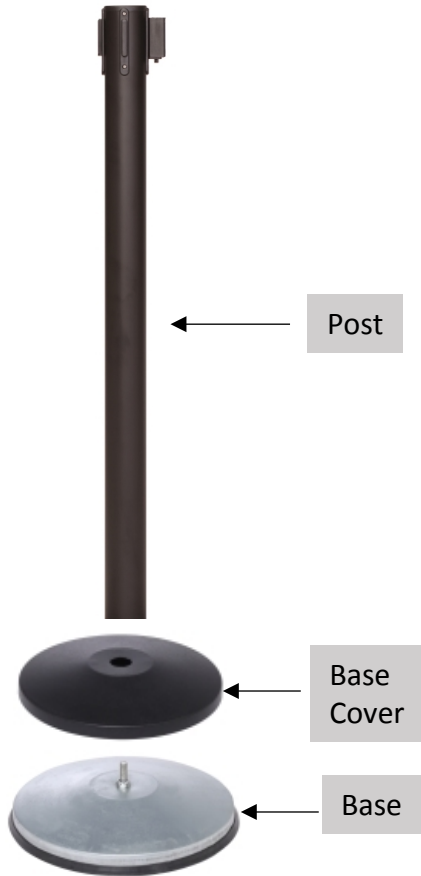

With the base cover in place screw the post onto the base. Make sure the post is screwed down as tightly as possible.

HINT
To make sure the post does not loosen with the base 'touch tight' turn upside down and using a wrench or socket on an electric drill fully tighten the base bolt.

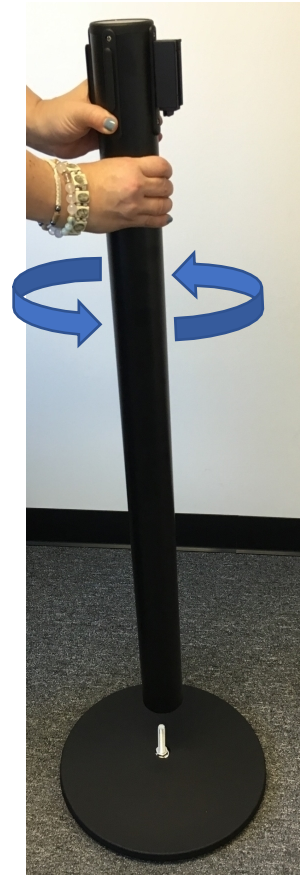

CONNECTING POSTS

Extend the belt and slide the belt end onto the receiver spline of the next post



HINT
Always leave 12" of belt inside the post to allow for play should the belt be pulled or pushed on.

BELT LOCK

To prevent accidental belt release twist belt lock 90°.

